
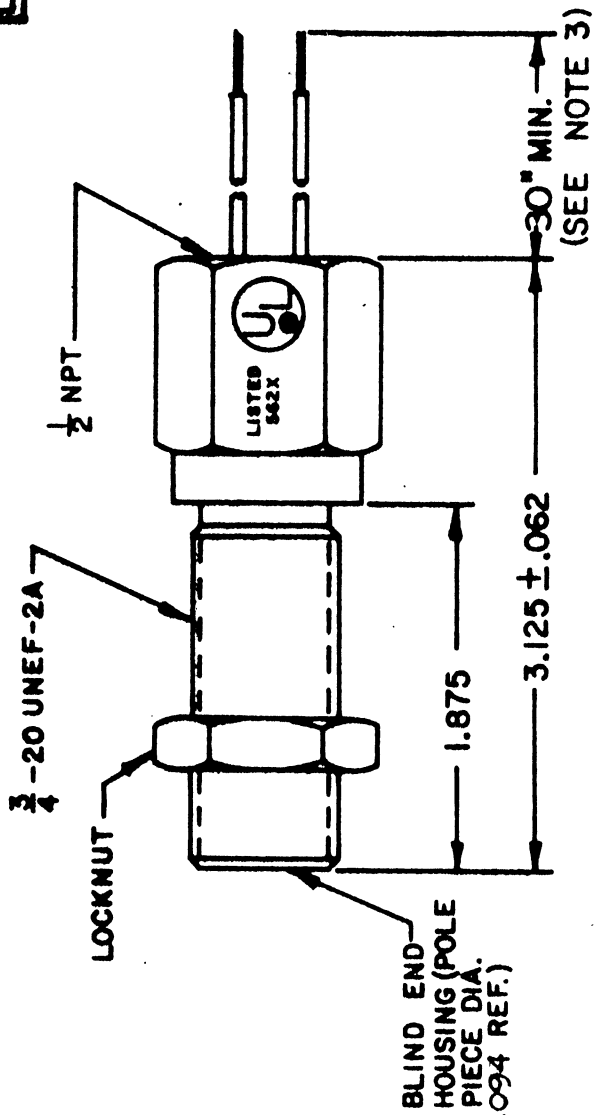


REVISIONS	DATE	APPRO
LTR	DESCRIPTION	

LISTED WITH  
 UNDERWRITERS  
 LABORATORIES, INC.:  
 CLASS I, GP A, B, C, D  
 CLASS II, GP E, F, G

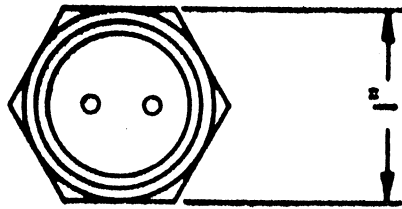

TEMPERATURE RANGE	OUTPUT VOLTAGE PEAK TO PEAK	DC RESISTANCE OHMS	INDUCTANCE MILLIHENRYS	OUTPUT CONNECTION	INSULATION RESISTANCE	NET WEIGHT
-100°F TO +200°F MAX. AMBIENT OR MTG. TEMP	23-33 VOLTS (SEE NOTE 1)	170-210 AT 75°F	29 NOM.	NO.18 AWG LEADS (SEE NOTE 2)	100 MEGOHMS MIN. AT 500VDC, COIL TO HOUSING	5.2 OZ. AVG.

NOTES:  
 1. TESTED AT 1000 INCHES/SECOND WITH A 20 PITCH,  
 30 TOOTH GEAR, 0.005" CLEARANCE AND 100,000 OHMS.  
 2. WITH APPROACH OF FERROUS METAL, WHITE LEAD  
 IS POSITIVE WITH RESPECT TO BLACK LEAD.  
 3. UP TO 100 FT. OPTIONAL

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES ARE

FRACT.	DEC.	ANGLES
± 1/64	.XXX ± .008	± 1/32°
	.XX ± .01	

MATERIAL:

CONSTRUCTION:  
 HOUSING - 303 STAINLESS STEEL  
 POTTING - EPOXY RESIN

DO NOT SCALE THIS DRAWING

**DYNALCO CORPORATION**  
 FORT LAUDERDALE, FLORIDA

DRAWN: *[Signature]* DATE: 10-11-78  
 APPROVED: *[Signature]* DATE: 10/11/78

TITLE: OUTLINE & SPECIFICATIONS  
 M140 U.L. LISTED MAGNETIC PICKUP

SCALE: NONE SIZE: A DRAWING NUMBER: 80000140 REV.: